

TCB-CBS₅ – THERMAL CONDUCTIVE BRAID CBS₅



Features

- OFHC copper, annealed
- Gold plated end plates
- Interfaces with CBS₅
- Non-magnetic

Description / Applications

Cooling of an experiment can be a challenge, especially in a vacuum without exchange gas. Introducing a Thermal Conductive Braid will help, as it forms a flexible bridge of high thermal conductivity between cold plate and experiment. A TCB can be integrated in any design, but end plates are matched for use with specific JPE positioners. One end plate is sandwiched between the cold plate and positioner, while the other is screwed to the top of the positioner.

Specifications

General info	
End plate compatibility	CBS ₅
Dimensions	See drawings below
Operational environmental conditions	20 mK to 375 K, ambient to UHV
Weight	9 g
Thermal properties	
Thermal conductance @5K	31 [mW/K]
Materials	
Main body	OFHC copper with gold plated end plates
Model specific information	
-50	Foil length is 50 mm, for use with a xyz stack
-V, -HV or -UHV	Level of vacuum compatibility, see the glossary on the homepage for details

Ordering Information

Available Models

TCB-CBS ₅ -50-UHV	Thermal Conductive Braid for CBS ₅ – length 50 mm
------------------------------	--

Available Options

None	Default delivery condition is Ultra High Vacuum compatible
------	--

Accessories

None



Mechanical and electrical information

Download 3D step files and manuals from:
<https://www.jpe-innovations.com/cryo-nano-products/>

Contact

For quotations, specials, or engineering services, please contact us at:
<https://www.jpe-innovations.com/contact/>

Drawings

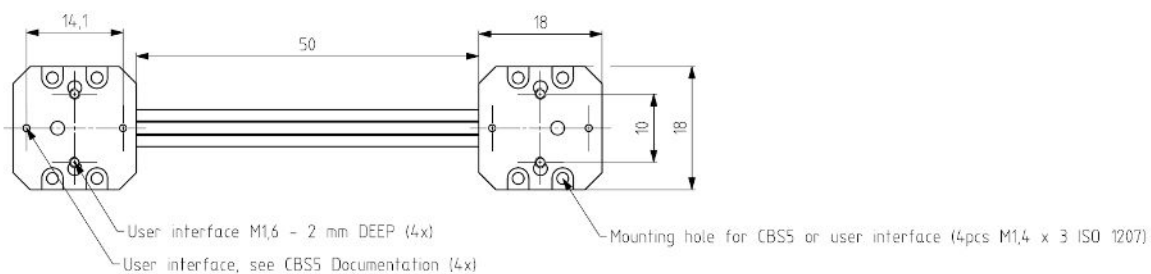

SCALE 1:1

PROJ.	SCALE	PART NAME	PART NUMBER
2024-10-11	2:1	TCB-CBS5-50	A001554
MP1	JPE	Aziëlaan 12, 6594AG Maastricht-Airport NL	A3 SHEET 1 OF 1

All rights reserved. Reproduction is prohibited without prior written permission. JPE disclaims any liability with regard to the accuracy, completeness, and timeliness of the information provided.

STATUS: RELEASED